


26° Punches

PU.117.26.R08 / R3

1000 kN/m max.

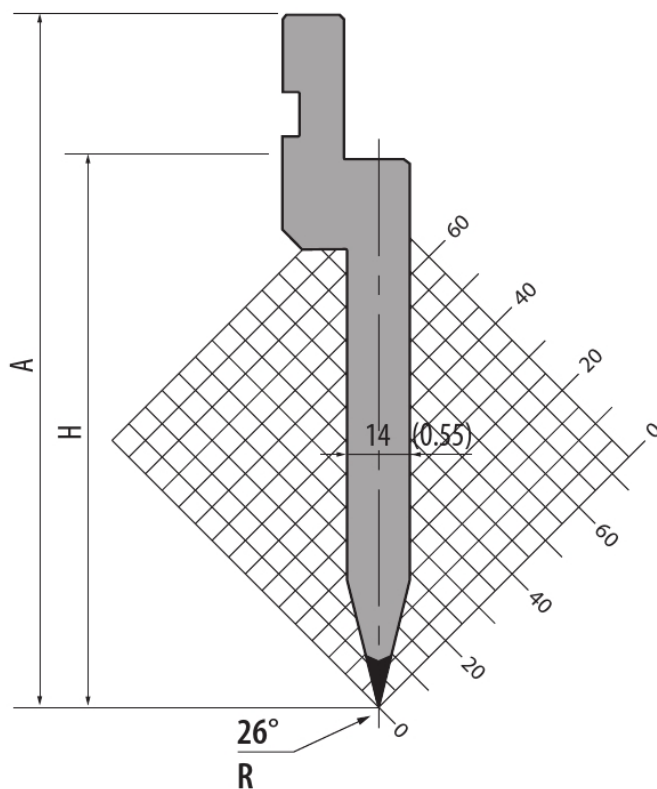

PU.117.26.R08	H=117.00 / A=147.00 / R=0.8 (H=4.61 / A=5.79 / R=0.031)		
	835 mm	32.87 in	13.5 kg
	415 mm	16.34 in	6.5 kg
	795 mm segmented	31.29 in segmented	12.8 kg
	805 mm segmented	31.69 in segmented	13.0 kg

PU.117.26.R3	H=109.00 / A=139.00 / R=3.0 (H=4.29 / A=5.47 / R=0.118)		
	835 mm	32.87 in	13.5 kg
	415 mm	16.34 in	6.7 kg
	795 mm segmented	31.29 in segmented	12.8 kg
	805 mm segmented	31.69 in segmented	13.0 kg

C45: 560-710 N/mm²

HORN
1

